Previous

App.F.IX-4]

1925

File No. 49-25

Previous References. (mune)

MC No-18 23 26 27 41 43, 45, 47 & 49

Serial Nos. 3, 4, 27

Later references.

GENERAL & REVENUE SECRETARIAT

Serial Nos.

Part B for December

SUBJECT

Estimates aggregating Rs 45,588 for laying out the Hosakote Road in the Shah Street

7 To, The Municipal Commr Bangalore City
The Comptroller to Govt
Nos 4370-1/ dt 16 12 25

Sanctions the estimate referred to above

HS. 22/12/25

General and Revenue Secretariat | File No. 49 of 1925

Serial No	
4	Letter No. 67 & 82/R.A.-10-25 from the Municipal Chairman, Bangalore City. Submits for sanction a supplementary statement of the 13 estimates connected with the laying of the Hospital Road with Stone setts and states that the total amount of the three estimates made is Rs 45,500/- and that the work have been completed. Some of the estimates viz, 1st, 2nd, 7th [illegible] supplementary statement ought to have been submitted after being scrutinized by Audit Officer after obtaining certificate of Audit the Chief Engr and then sanctioned by Govt. In view of the fact that the works covered by the 13 estimates have been completed, whether the estimates may be formally sanctioned & [illegible] for orders. [illegible] 11/25 — 4/11/26 In Govt Order R 2778-5-Pub 110-18-48 dated 26th August 1925, first sanction was accorded for Rs 153-685 for laying the Hospital Road. It is stated that the scheme was executed in parts under 13 Estimates amounting in all to Rs 45,500/- which have also been completed. Each estimate was supplied with the approval of the Municipal Council & the Improvement Committee the date on which the sanction of the Board

H—4 of 10 Sheets

App. F III—2]

File No. 04 of 192

WD 0566—GPB—40,000—21 7-25

General and Revenue Secretariat

Serial No.

General and Revenue Secretariat | File No | of 192

Serial No

19 IV 25
2763.

[illegible] obtained is entered in the Statement in each case [illegible]. There has been a slight saving over the Schedule in the case of Lady [illegible] I & II Schedule No. 3 and of the Overseers by the Chief Engineer also. It is not stated whether this was done. It may not serve any useful purpose to enquire this being done now, after completion of the work in case this is not done already. The action taken by the Head Concerned may perhaps be sanctioned.

[illegible]
28
10/11/25

[illegible] to all the works have been completed, the action of the Executive Engineer may perhaps be sanctioned.

[illegible]
10/11

[illegible]
11/11

[illegible]
11/11

[illegible]
26/11/25

[illegible]
Tube
28/11

Note—Costs Short

App. F .III.—2]

WD 0569—GPS—40,000—31 7-26

File No. M of 1932

General and Revenue Secretariat

Serial No.	Notes—Contn. Sheet

[App. F Lly—2

General and Revenue Secretariat

Hyle No. 49 of 1925

Serial No



Note—Contn. Sheet

WD 0569—GPB—40 000—31 7-25

File No

of 192

General and Revenue Secretariat

Serial No	

Note—Con

Submitted to His Highness.

In Government Order No R 2773-5/M1 110-18-48, dated the 26th August 1919, sanction was accorded to an estimate amounting to Rs 1,55,439 for laying the Hoskote Road into a Shop Street

1	For improving existing Road and opening new ones	Rs 13,153
2	For payment of compensation for properties acquired	Rs.1,42,286
	Total	Rs.1,55,439

G In his letter No 373/C I dated the 22nd/23rd November 1923 the then President of the City Municipal Council Bangalore, stated that as the above estimate was only a rough one, he would submit a consolidated detailed estimate for the sanction of Government

M The Municipal Commissioner, Bangalore City, has now submitted a consolidated statement of thirteen estimates aggregating Rs 45,588 operated upon with the sanction of the Municipal Council and all these works are said to have been completed.

Y Draft sanctioning the estimates is therefore submitted for the gracious approval of His Highness

Bangalore,
4th December 1925

TMK

Record of Cases submitted for the Orders of His Highness the Maharaja.

Subject

Estimates aggregating Rs 45,588 for laying out the Hoskote Road into a Shop Street

4-12-25

Order

~~KRW~~

5/12/25

[App. F III—2

General and Revenue Secretariat	File No.	of 192

Serial No

7

Note—Contn. Sheet

App. F III–2]

WD 6568—GPS—40,000—9-27-22

File No. [illegible] of 192

General and Revenue Secretariat

Serial No.	

NOTE—Contn. Sheet

OFFICE OF THE CITY MUNICIPAL COUNCIL,

No. [illegible]

Bangalore City, dated 22nd November 1923

2128-3 16684

From

ANANDA RAO SIRSI, ESQ., B. A., LL. B.,
President, Municipal Council,
BANGALORE CITY

To

The Secretary to the Government of His Highness the Maharaja of Mysore, Local and Legislative Departments, Bangalore.

Sir,

Adverting to Government Proceedings No.R.2775--6/21 1100-1848 dated the 25th August 1923, sanctioning an estimate amounting to Rs.1,55,439 for laying the Mosakota Road into shop sites, I have the honor to state that the estimate above referred to being only a rough one, a detailed estimate had to be prepared and submitted to Government for sanction. With a view to prepare the consolidated estimate after some time, part estimates for works urgently needed were prepared one after another and some of the works executed after they were approved by the City Improvement Committee or the Municipal Council.

2. A detailed part estimate for Rs.17,950/- for widening the road to 100 feet from the bridge over the main drain up to the Metal Factory was prepared [illegible] in January 1921 and after obtaining the approval of the City Improvement Committee and the Municipal Council thereto, the work was executed. Again in October 1922, another detailed part estimate for Rs 11,340 was prepared and after obtaining the approval of the Municipal Council to the same, the work was started in November 1922 and has just been completed. A third estimate amounting to Rs.3529 for forming a berm in the centre of the road and providing curb stones on either side of the same was prepared on 30th October 1923 and after it was approved by the

2929

municipal council, the work was put in hand and will be completed ~~but~~ in a few days.

2. works such as forming the cross roads, constructing the drains, and water hydrants etc, have yet to be executed A consolidated estimate will be prepared and submitted shortly for the sanction of Government

I have the honor to be,

sir,

your most obedient servant,

President.

G. R. S. VI-G-22]

SUBJECT _____

Diary No of letter replied to

Section _

File No. _

Serial No. _

General and Revenue Secretariat
(L S G)
, the 192

No. L 5-5 83

Date of issue 2 Feb 1925

To

Signed by Asst. to Magistrate

To Revenue in the form appl

HC
28.1.25

Head Quarters _____

_____ In inviting reference _____
to the Personal Order of 27th th
C.S. No. 22/23 dated 1923 _____
requiring to submit an amended
Budget Estimate for _____
laying the Markets Road into
a Shafi Road, I have received
to request you to do so early
and to enclose an abstract of
the amended Estimate, as
it is pending for a very long
time. _____

_____ Yours Sincerely

_____ over 30/1

To H. Q. Krishnaswami Rao Esq B.A.
HC 23 Head Asst, Office of the Local Council,
29.1.25 Bangalore City

Office of the City Municipal Council.

Bangalore City, Dated... 26th October, ... 1925

2753 Ex.
27 OCT. 1925

M G KRISHNASAMI RAO, Esq., B.A.,
Municipal Commissioner, Municipal Council,
Bangalore City

Mul 49-25-4

B. Nagappa, Esq., Bar-at-Law,
Secretary to the Government of
His Highness the Maharaja of Mysore,
Local and Legislative Departments,
Bangalore

SIR,

Adverting to your D.O. letter No. L. 5583/XII. dated 2nd February 1925 and intimation of this office letter No. 373/C I. dated the 22/23rd November 1923, I have the honor to submit herewith for favour of sanction of Government a consolidated statement of all the thirteen estimates connected with the laying of the Venkata Road into shop sites. The date of the resolution of the Municipal Council or other authority sanctioning each estimate is noted in the statement at the top of each work. The total amount of all these estimates is Rs 45,000/- and all these works have been completed.

I have the honour to be,

SIR,

Your most obedient servant,

M G Krishnasami Rao

Municipal Commissioner.

Forwarded with Compliments,

Honorary President.

Estimate No. II

Special Repairs for metalled

from the Road Journal up

Unto Mancepa

1	Collecting Carting and Stacking Road metal for both Sides	
2	Collecting Carting and stacking gravel for blinding	
3	Collecting Carting and Spreading [illegible] Sand	
4	Picking and Scarifying Road Surface	
	Do Do	
5	Spreading and Consolidating road metal	
6	Spreading and Consolidating gravel for blinding	
7	Lenses stone for picking	
	Do Do	
8	Watering road for Consolidation	
9	Barricading lighting and watchmen's Charges	
10	Earthwork Cutting for metalling portion	
11	Temporary Establishment	
12	Cost of Firewood supplied	
	Total Rupees	113

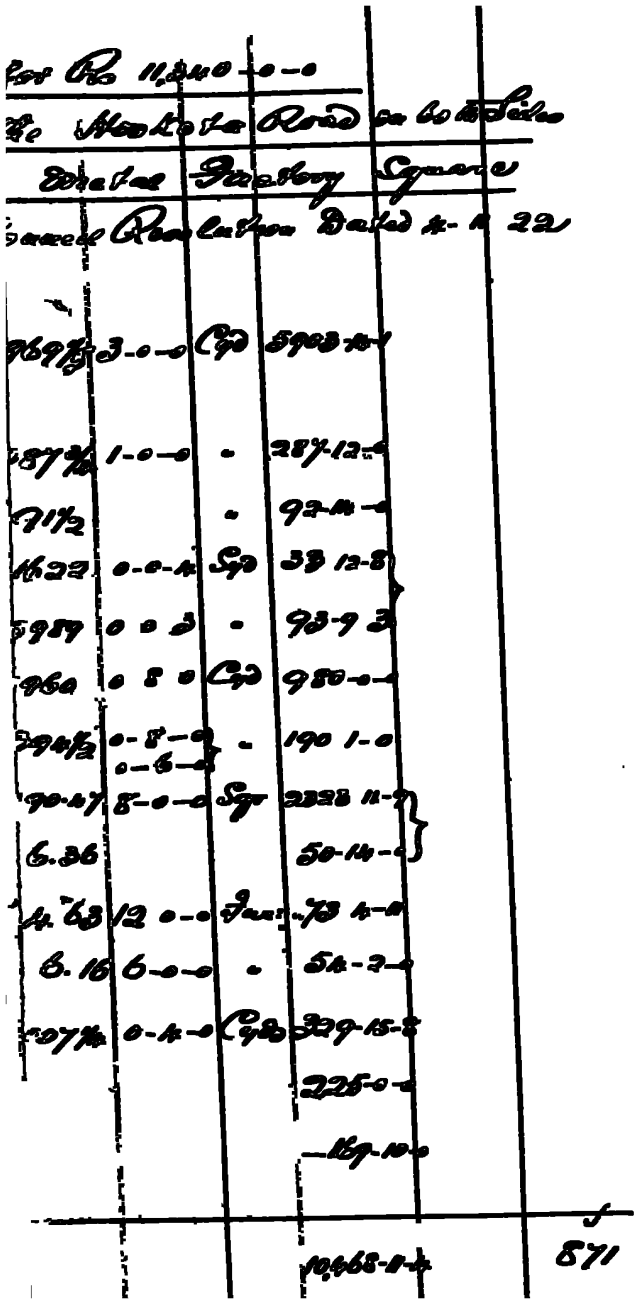
Rs 11,240-0-0
Dhadar Survey Square
Reclamation Dated 4-1 22
3-0-0 Cp 5903-12-1
1-0-0 " 287-12-0
" 92-14-0
0-0-4 Sp 33 12-8
0 0 2 " 93-9 3
0 8 0 Cp 980-0-0
0-8-0 " 190 1-0
0-6-0
8-0-0 Sp 2328 11-2
50-14-0
12 0-0 " 73 4-0
6-0-0 " 54-2-0
0-4-0 Cp 329-15-8
225-0-0
187-10-0
10,468-8-4
871

Estimate &c

Estimate for Forming a
Stockton Road and provid
Neck Drainage
Dated

1	Kerbing Stones on both Sides of the Carriage Barn including Circular portion			
a	Dressing and fixing old slabs for Kerb stones			
b	Resetting old Kerb stones wherever necessary			
c	Removing and relaying old Kerb stones			
d	Forming labour for dressing and fixing Kerb stones			
2	Excavating stone pitching Forming & levelling old bed			
3	Carting the Excavated Earth to Circle			
4	Constructing Shoulder drains			
5	Dragging the Earth from the Barn and levelling			
6	Earth work Cutting bed			
7	Watering and Spreading Sand and rolling			
8	Colar washing for Kerb stones			
9	Cleaning Kerbstones			
10	Cutting grooves in Kerbstones			
11	Pouch work in Sand mortar			
12	Sand Concrete with old Jelly			
13	Carting rubbish to a distance of 1/2 furlong			
14	Covering the Kerb stones			
15	Draw Jamming the Road			
16	Sundry works			
	Total Rupees			

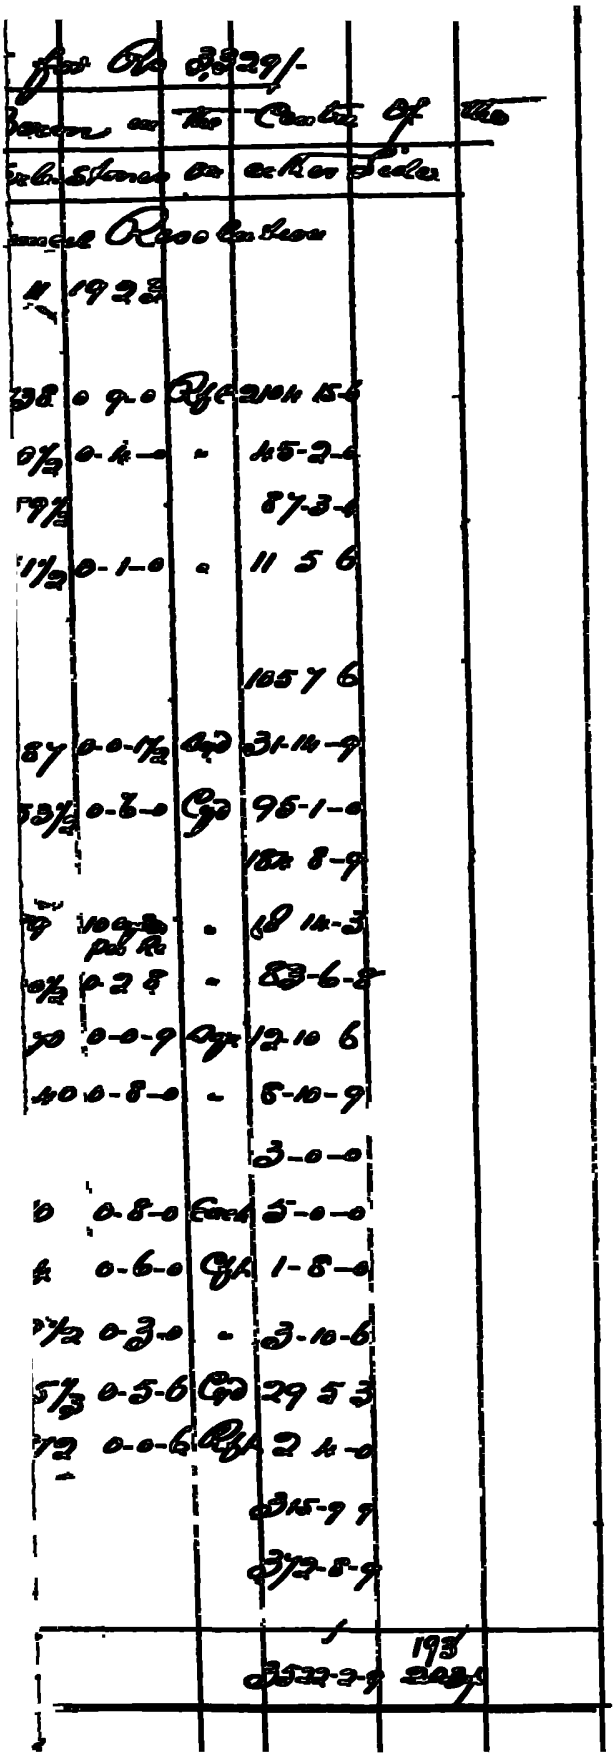

Estimate No

Estimate for Blasting and Level the Surface of Hard Rock and removing Debris

1	Blasting rock to the level of the road	
2	Lowering the bed of old metalled road for pitching in Centre	
3	Earthwork, Cutting Carrying for covering the Existing road for metalling	
4	Steam Road roller Charges	
5	Painting signs boards	
6	Removing and re-fixing Gratings	
7	Removing 6" Covering Slabs and refixing the Same	
8	Sundry Charges	
	Total Rupees	485/-

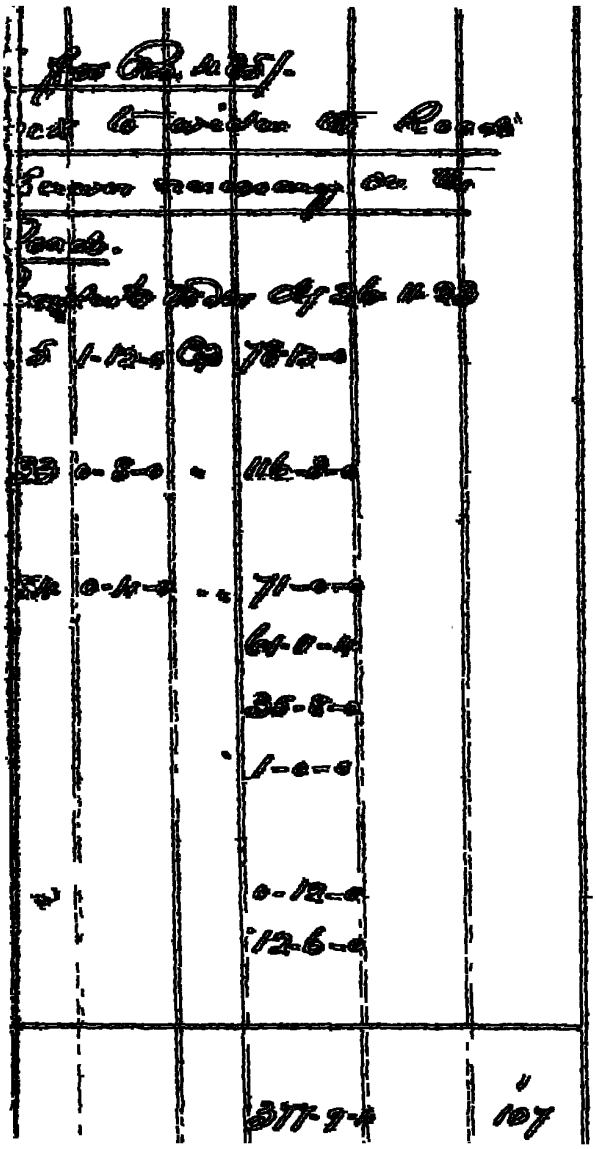

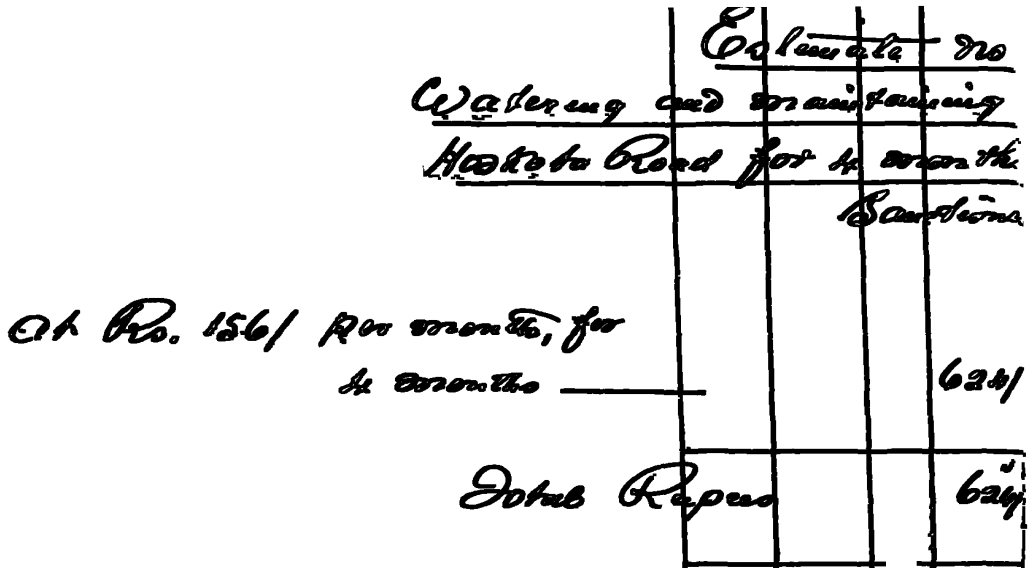
Calcutta do
Watering and sweeping
Harkata Road for 4 months
Sundries
Ch Rs. 156/ Rs months, for
4 months
624/
Total Rupees
624

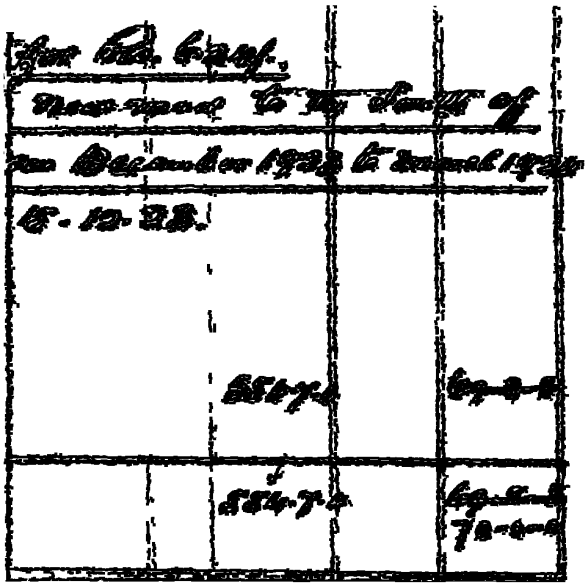

Estimate No III for

Estimate for Constructing

Vehr Manchepah

Dah

1	Earthwork Excavation	
a	Laterite soil	
2	Rubble Mortar Concrete	
3	Stone Masonry in Rubble mortar	
4	Bed Slabs 4" thick with Close joints including pointing the Central Drain	
5	Covering Slabs 6" thick with Close joints	
6	Cement pointing the Side walls	
7	Fixing iron Gratings	
8	Metalling and repairing the Road Surface	
9	Bailing water	
10	Watchmen and lighting	
11	Watchmen's Charges	
12	Earthwork Excavation for Side drain	
13	Earth Cushion over covering Slabs	
14	Grooving Slabs for fixing iron Gratings	
15	Removing the existing stone and re pitching	
16	Removing and refixing Kerb stones	
17	Cutting 6" the Central Kerb stone for fixing iron Gratings	
18	Gravel spreading and Consolidation including Collection	
19	Collection of Sand and spreading	
20	Watering Coolies	

Total Rupees 12½ /- on the one

Rupees

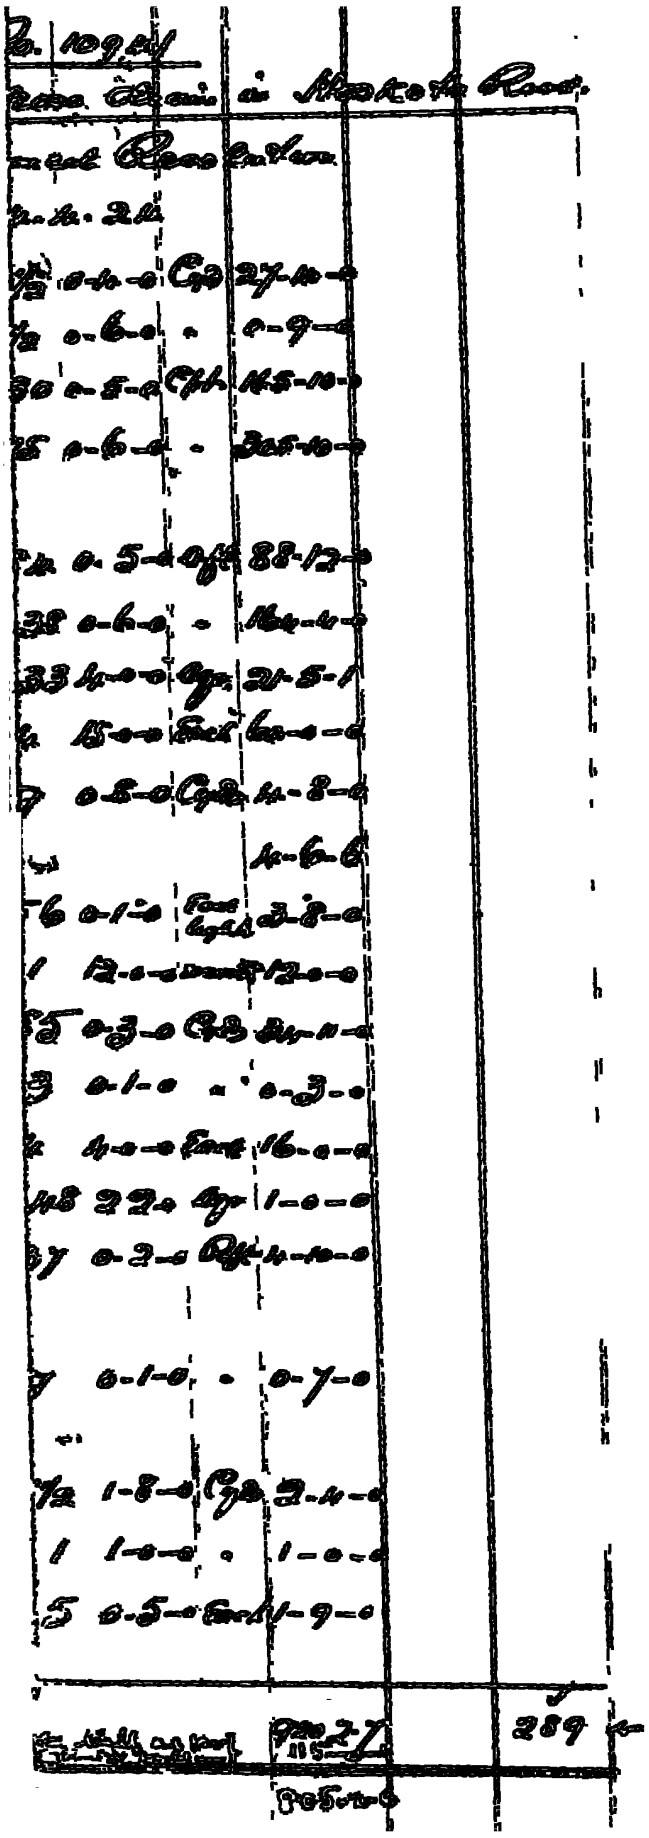

Estimate no. VII

Widening the Existing Slabbed

Drain on Ab

Scale 2 inches per

Of

1	Removing the Old Slabs of the Main Drain	
2	Earthwork Excavation for foundation	
3	Laying Lime Concrete for foundation	
4	Stone masonry in Lime mortar including bond Stones	
5	Laying New burnt Clay Slabs 4" thick in Lime mortar	
6	Constructing Cut waters with Old Stones in do	
7	Dismantling old stone masonry	
8	Constructing masonry in dismantled stones and Lime mortar	
9	Reflooring the bed of the main drain with Old Slabs including Cement pointing	
10	Cement pointing to masonry	
11	Covering with burnt Clay Slabs 8" thick with close joints	
12	Baling water	
13	Carrying and filling Earth over covering Slabs for Cushion	
14	Covering with burnt Clay Slabs 6" thick for foot path	
15	Removing, Carrying and Covering 6" thick Old slabs for foot path	
16	Filling gap of Gutters with Cement Concrete 1:2:4 with wire net and Cement Plastering including bolts and nuts	
17	Casting Girders from material (No 8) 12"x6"x24' long	

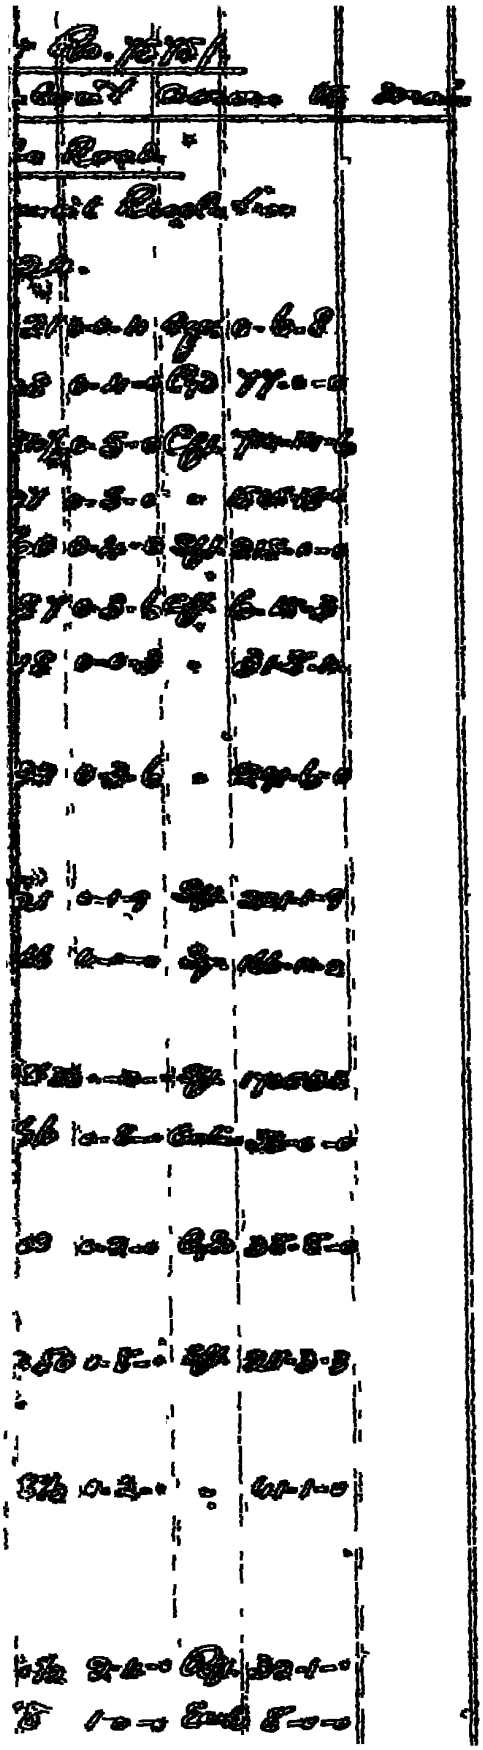

18 Cleaning the gudeons _____

19 Hoisting and fixing gudeons in wheel _____

20 Painting gudeons with two coats of tar _____

21 Drilling holes in covering slabs for fixing iron standards _____

22 Dismantling brick masonry parapet wall

23 Removing and replacing 6" slabs for drilling holes

24 6" slabs dressing and fixing over parapet wall in mortar _____

25 Dressed stone pillars fixed at corners of parapet wall _____

26 One line dressing for the faces of dwarf wall

27 Collecting Carting and Stacking Road metal

28 _____ Do _____ Do ___ Gravel

29 Do Sand including spreading

30 Stacking old metal got from picking the road

31 Collecting and forming the new Surface & macadam metal _____

32 Earth work, Cutting and Casting for filling the road

33 Consolidation of road metal _____

34 _____ Do _____ Do Gravel _____

35 Barricades and Lighting _____

36 Watchmans Charges _____

37 Stone masonry in Cement mortar _____

38 Fixing iron Standards in Cement mortar including drilling holes in slabs _____

39 Watering for Consolidation of Earth bgm metalling

40 Constructing Dampe parapet wall _____

41 Fixing Standards & fill in holes _____

42 Purchase of Steel gudeons 7½" _____

43 Casting gudeons 12" x 6" _____

44 Cost of Coal iron standards _____

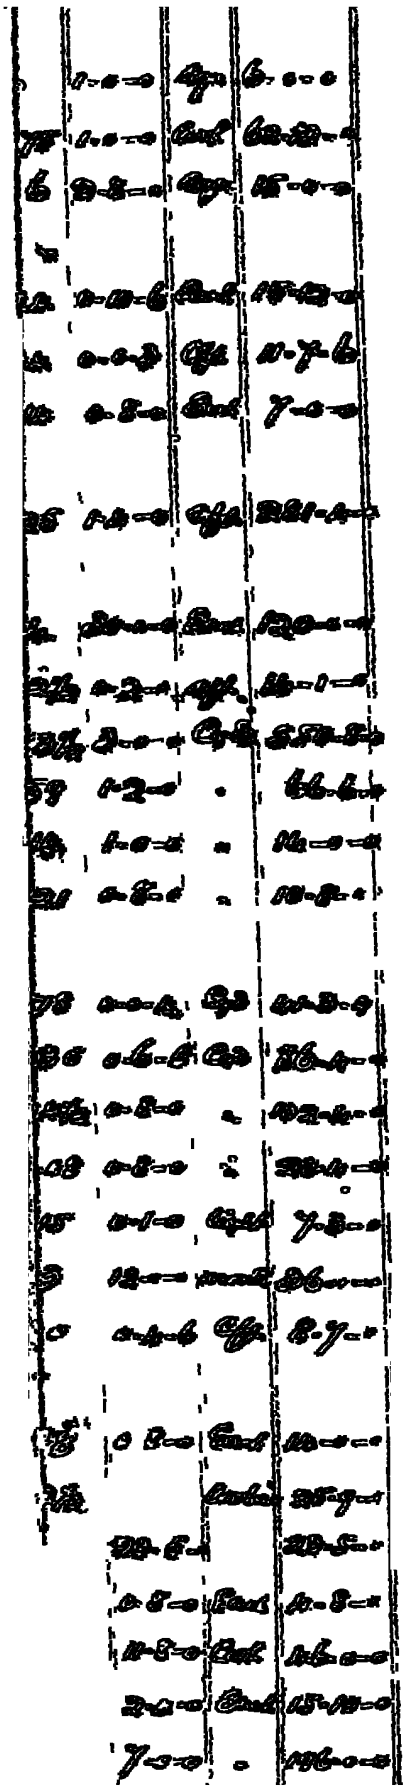

1	45	12 Bolts welded into the bottom of Standing			
1		and washers and nuts complete			
2	46	Cast iron Stone below Standard 30" long			
2	47	Do Do 15" long			
	48	Wrought iron Gas pipe 1" diameter			
2	49	Cast Iron			
2	50	Cross Cutting in Covering Slabs of 8" Brick			
2	51	Dismantling and reconstructing with old			
		Stones in Lime mortar			
	52	New bond Stones in old masonry			
	53	Forming to Iron over Tunnel			
	54	Painting materials			
	55	Temporary Establishment			
	56	Department Labour			
	57	Work supplied by Department			
		Total Rupees			

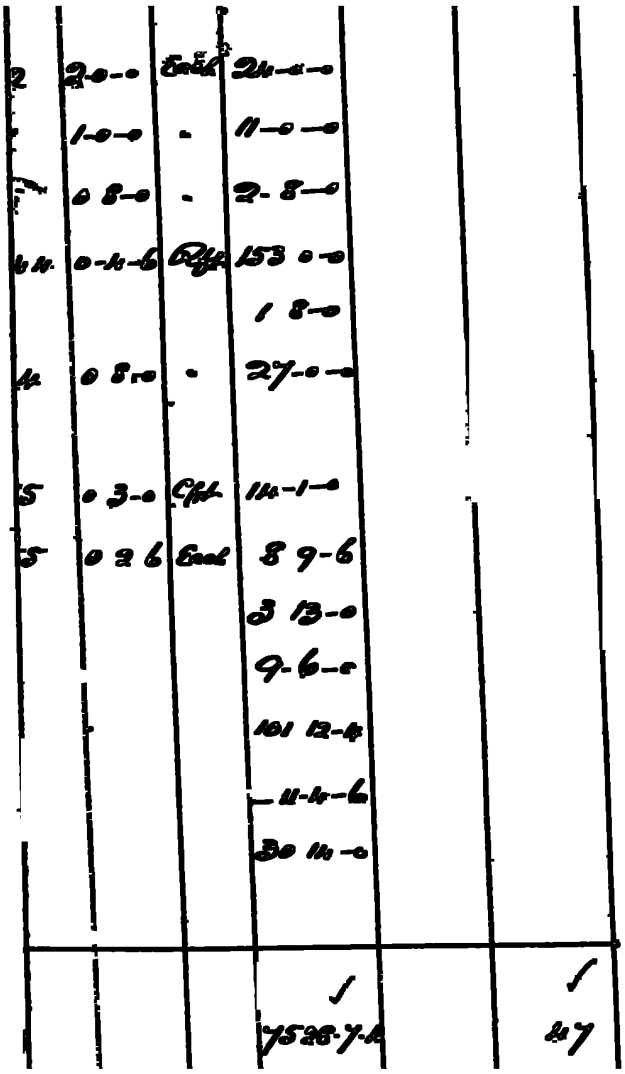

2	2-0-0	Each	24-0-0		
	1-0-0	"	11-0-0		
	0 8-0	"	2-8-0		
44	0-1-6	Rft	153 0-0		
			1 8-0		
4	0 8-0	"	27-0-0		
5	0 3-0	Cft	14-1-0		
5	0 2 6	Each	8 9-6		
			3 13-0		
			9-6-0		
			101 12-4		
			11-4-6		
			30 14-0		
			£	£	
			7528-7-4	47	

Work carried out by Department

Estimate No. VII

Easing the Curves of Kerbing

Pedestrian 20ft & 30 ft

Viola Municipal Co

Orders

1	Earthwork Excavation for Easing the Curves including filling at the end of Lanes on the South Side	
2	Removing and refixing Kerbstones on the South Side ~~(also supplying bricks for Curves)~~ ~~(Lane 3 feet 6 inches)~~	
3	Removing and repitching on the Southern Side	
4	Cutting Grooves in Slabs for Shoulder drains including Cost of Slabs	
5	Dismantling and reconstructing Shoulder drains in old Stone in mud	
6	~~Dismantling and reconstructing Shoulder drains~~	
6	Removing and refixing 4" Slabs	
7	Removing the Sides of road	
	Total Rupees	1600

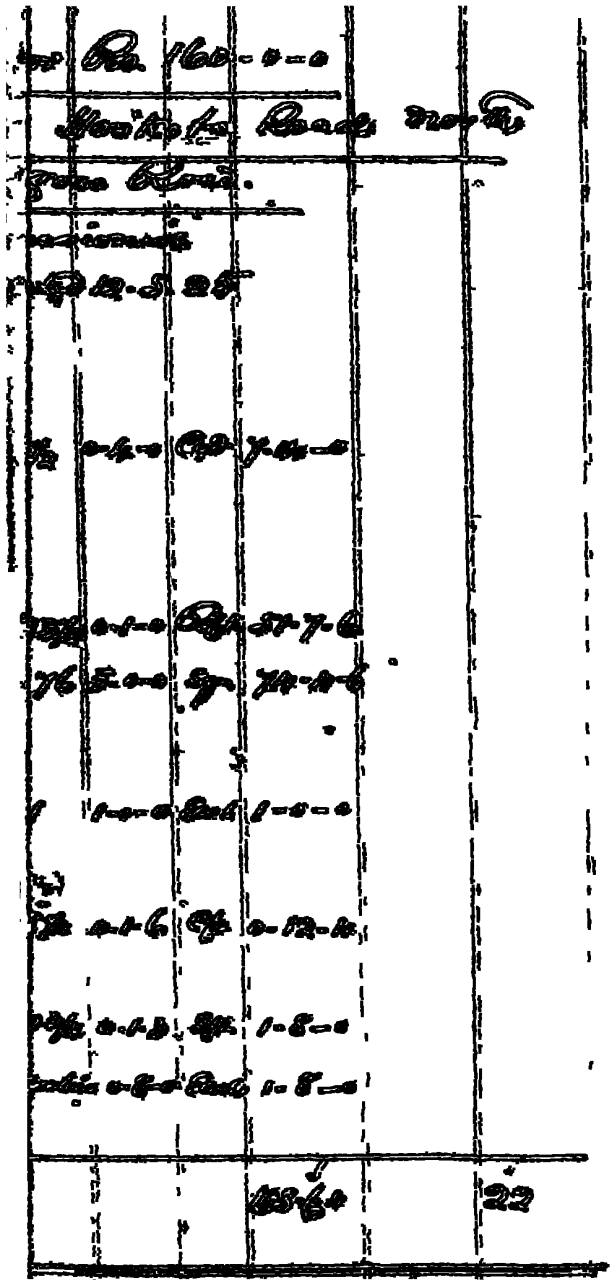

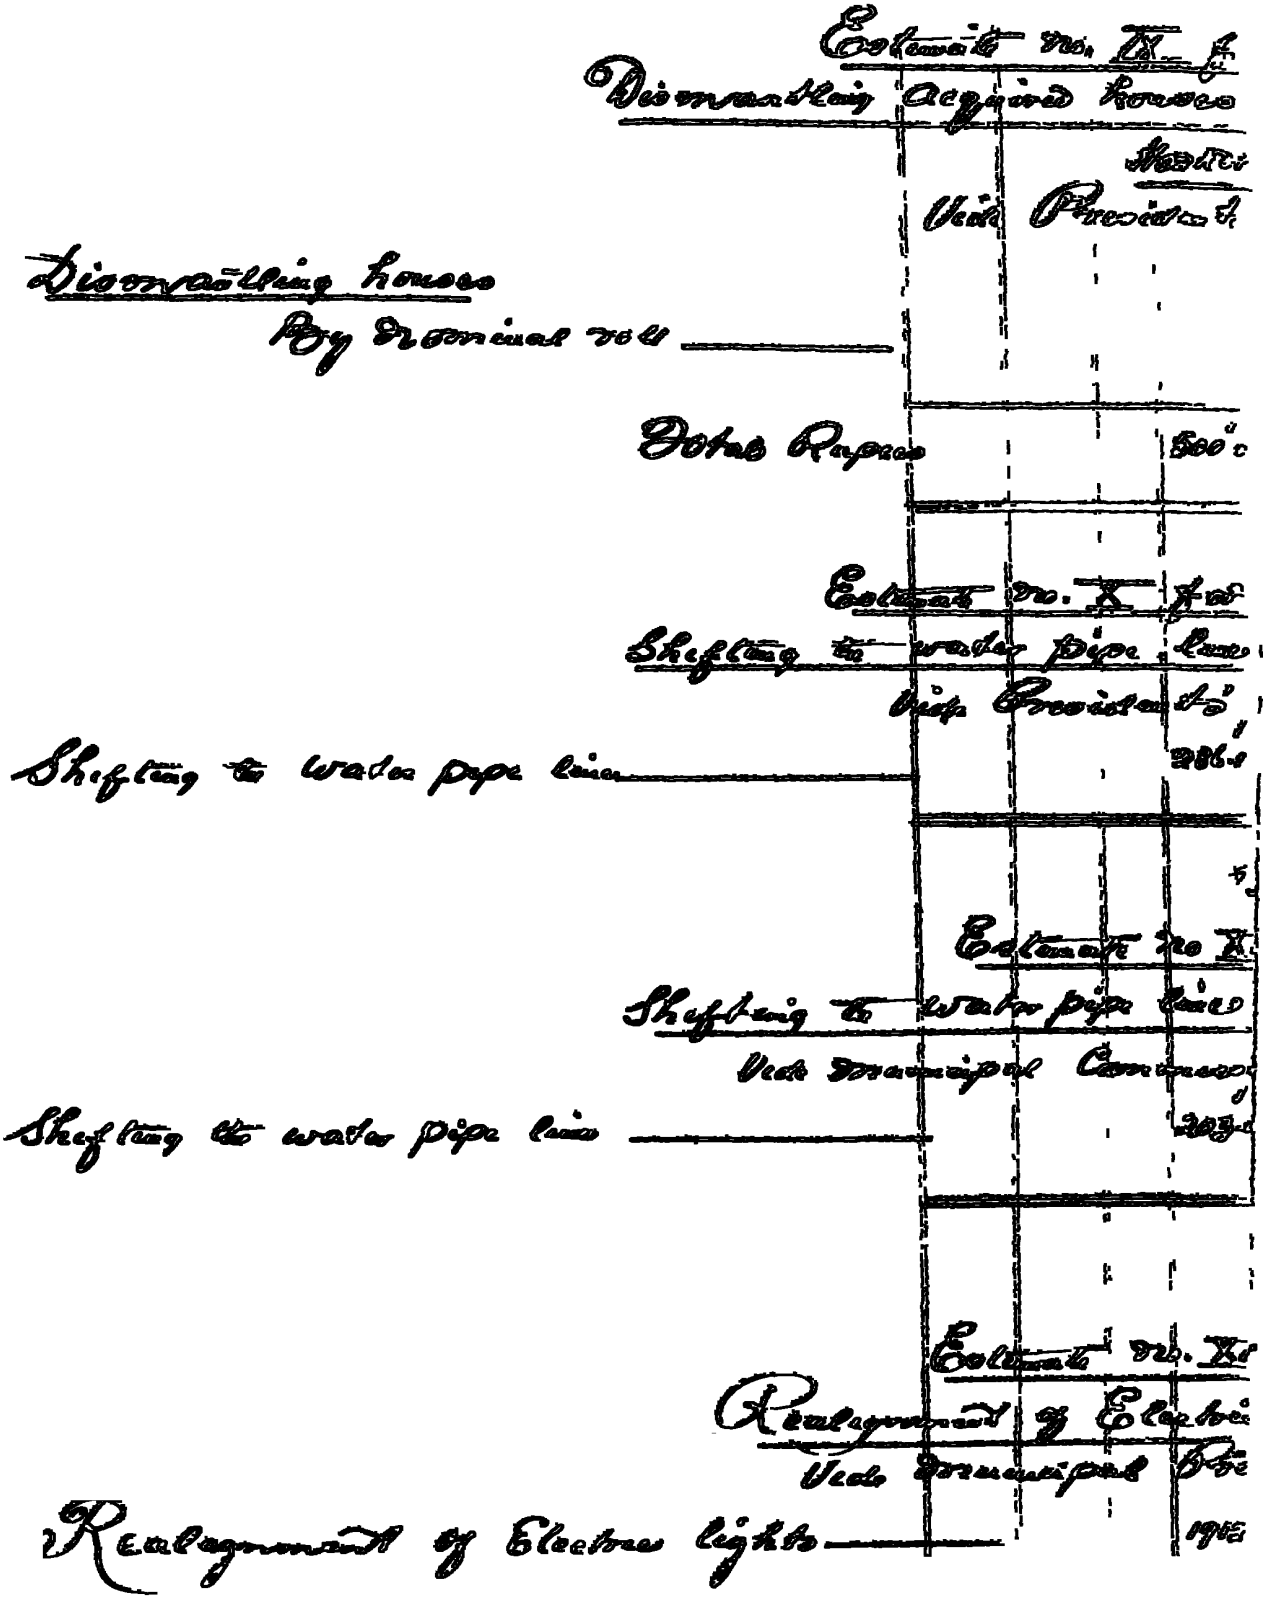
Estimate no. IX
Dismantling acquired houses
Dismantling houses
By nominal roll
Estimate no. X
Shifting of water pipe line
Shifting of water pipe line
Estimate no. XI
Realignment of Electric
Realignment of Electric lights

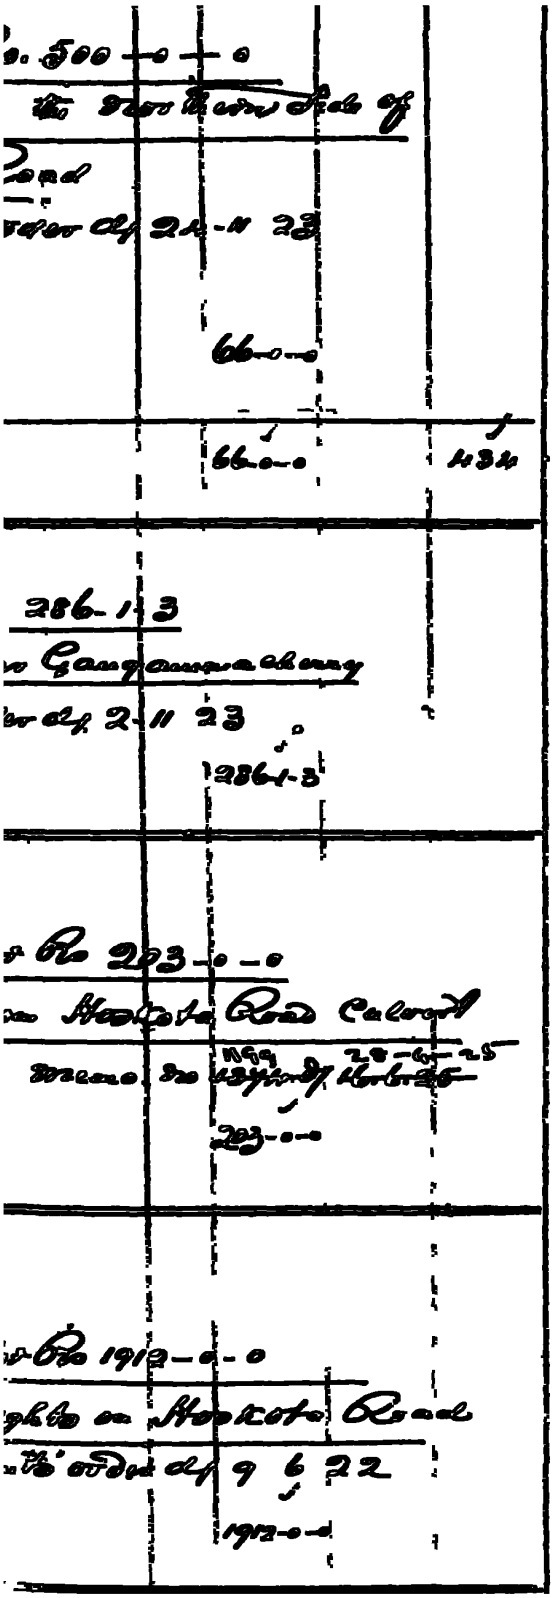
500-0-0
66-0-0
66-0-0
1434
286-1-3
2861-3
223-0-0
223-0-0
1912-0-0
1912-0-0

Estimate No

Estimate for Laying a

Under Drainage Co

1	Earthwork Excavation including filling and Consolidation	
2	Glazed stone ware pipe 9" diameter including Cutting Etc	
3	Earthwork Excavation for Masonry Etc	
4	Surki Concrete for foundation	
5	Stone Masonry in Surki Mortar	
6	Burnt Stone Slabs for flooring with Cement pointing	
7	Covering Slabs 6" Thick	
8	Cement pointing for side walls	
9	Earthwork Cutting for forming 20' road	
10	Earthwork Scraping for filling undulations	
11	Earthwork filling in road	
12	Masonry Construction	
13	Cutting Side drains	

Total Rupees

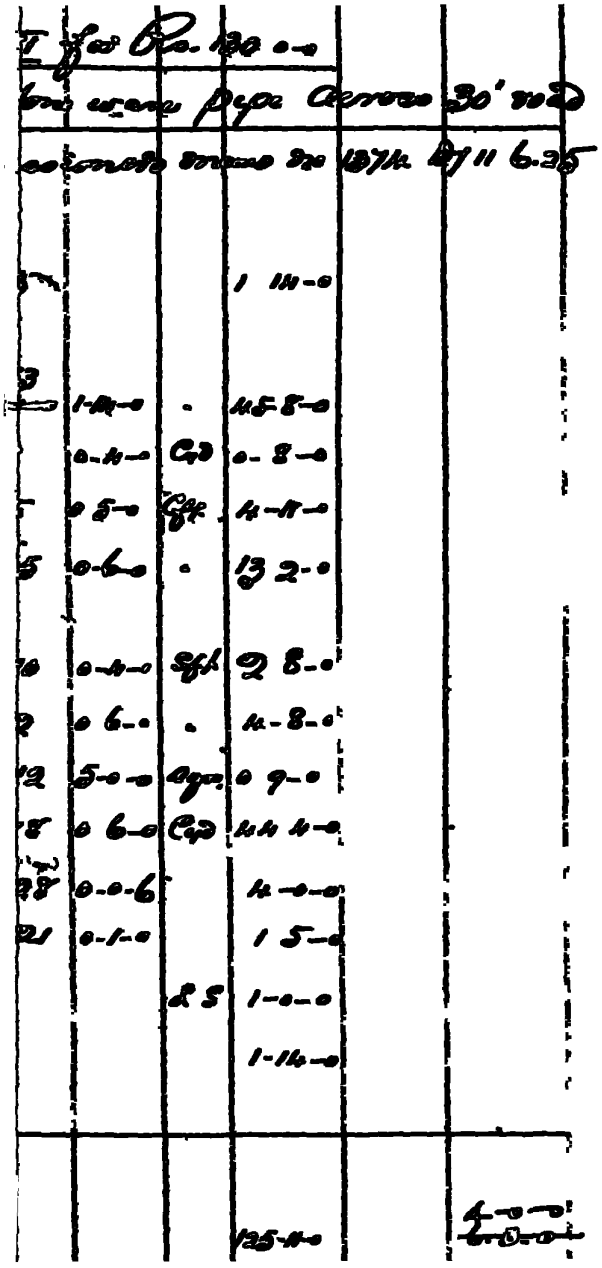

Abstract.

1	Widening the Hoskote Road to 100 feet		17.9
2	Special Repairs for metalling the Hoskote Road on both Sides from the Road Junction up to Model Dairy Square	1	113.6
3	Forming the Berm on the Centre of the Hoskote Road and providing Kerb Stones on either Side	1	332
4	Blasting rock to widen the Road and Level the Surface wherever necessary on the Hoskote Road		1185
5	Watering and maintaining the new road to the South of Hoskote Road for 12 months from December 1923 to March 1924		624
6	Constructing Cross drains on Hoskote Road		1090 C
7	Widening the Existing Slabbed Culvert Across the Drain drain on Hoskote Road.		75'5"
8	Easing the Curve of Kerbing on Hoskote Road with between 50 feet and 30 feet cross Road.		160
9	Demolishing acquired houses on the Northern Side of Hoskote Road		500
10	Shifting the Water pipe line near Ganganachetty		286 A
11	do do from Hoskote Road.		203
12	Realignment of Electric lights do		1912 0
13	Laying a 12" Stone ware pipe across 30' road		120-0
	Total		4[illegible]

Municipal Commissioner,
Bangalore City Municipality.

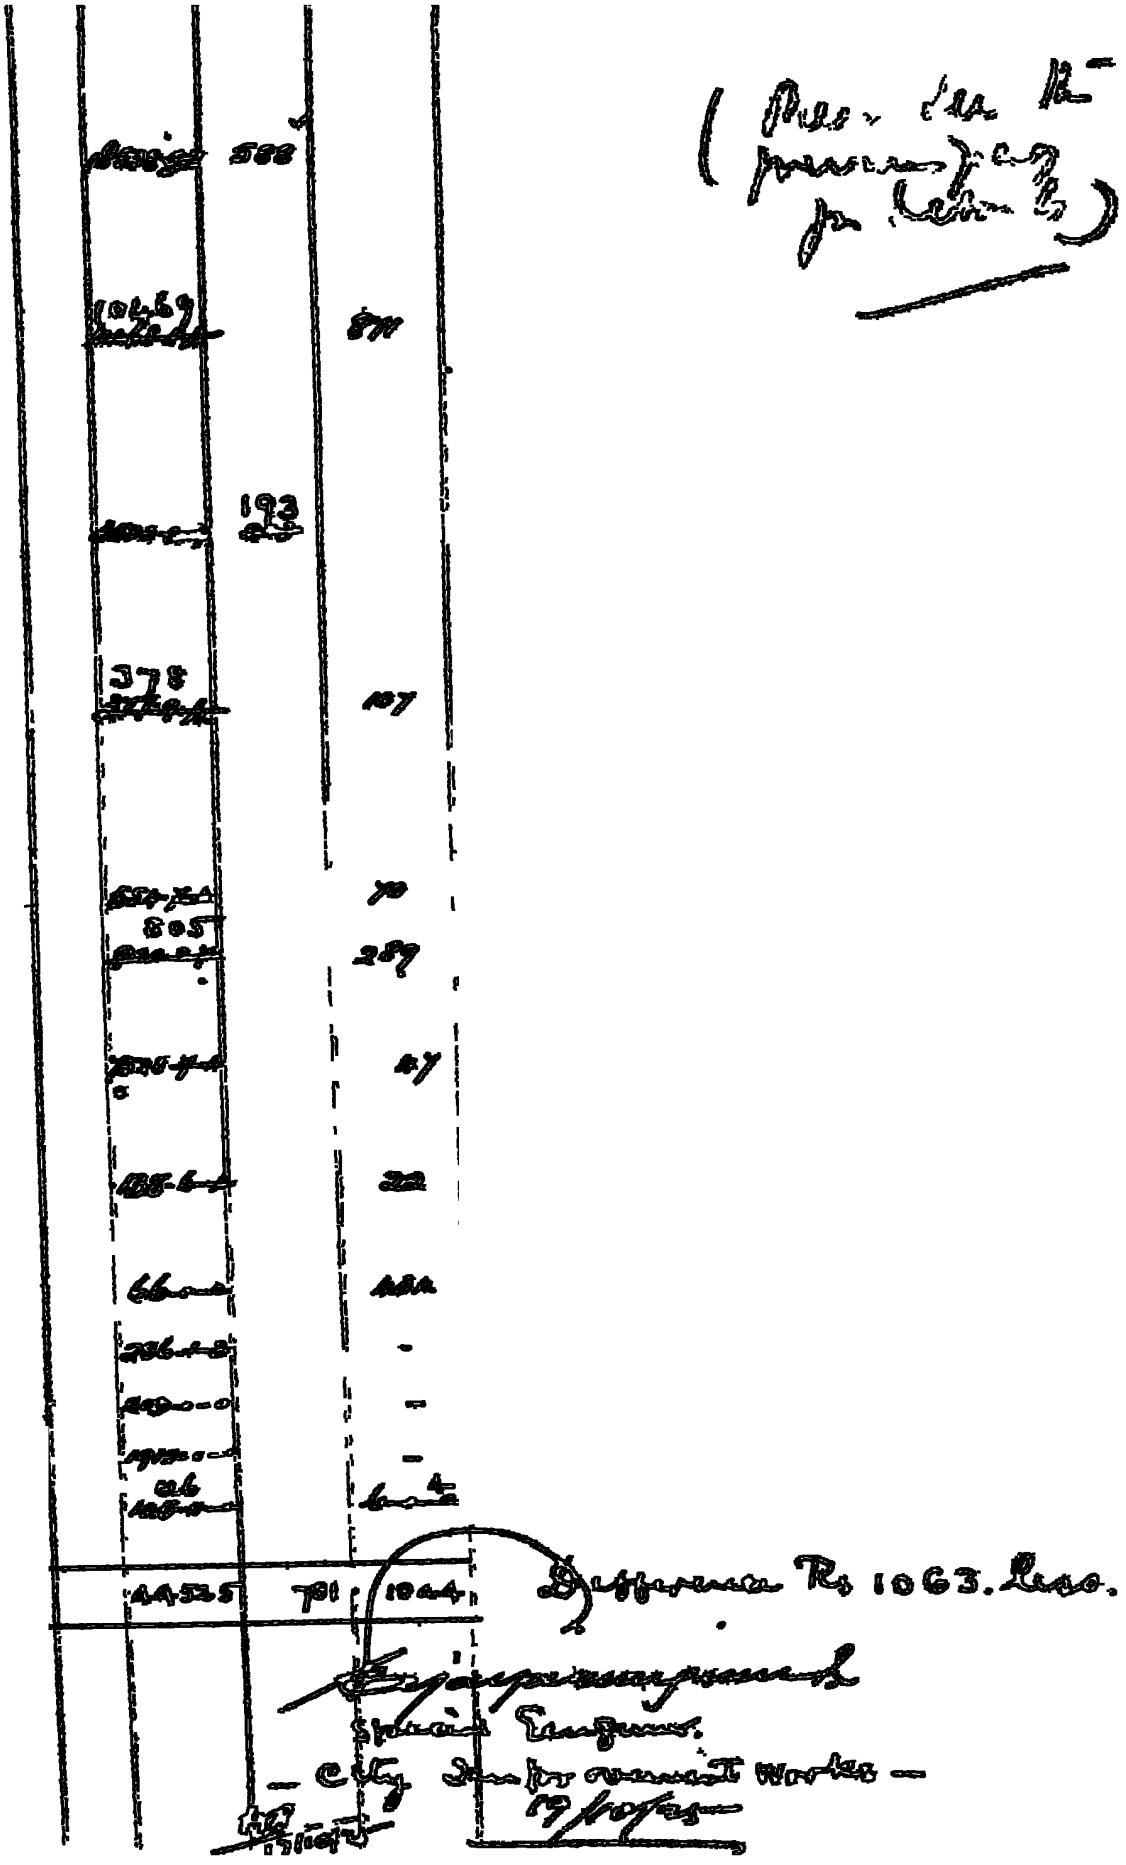
193
378
605
1044
Difference Rs 1063. Less.